


Prefabricated plants for sewage water purification

Series IMO/P Monobloc Imhoff tanks.

Technical specifications

Supply of a prefabricated monolithic Imhoff tank type EMS WATER TECHNOLOGY series IMO/P, made of watertight reinforced concrete, dimensioned according to the Gazzetta Ufficiale n. 48 regulations dated 21 February 1977 (Technical regulations for the Law n. 319/76), complete with separation sects between the sludge settling and digestion sections, deflectors for the incoming and outgoing sewage and concrete inspection manholes.

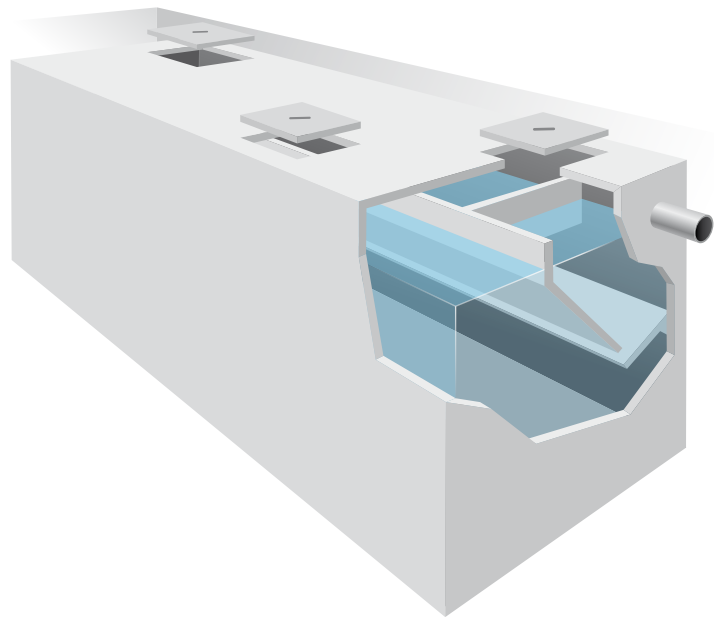

IMO/P series with monobloc rectangular plan and horizontal axis for discharge in public sewer - leg decree n. 152 dated 03/04/06

MODEL	E.P. equivalent people		USEFUL VOLUME Sed+grease sep. lt	EXTERNAL DIMENSIONS			WEIGHT q.l.s
	Vol. sed+grease sep. 200 lt/person	Vol. sed+grease sep. 250 lt/person		Width cm	Lenght cm	Height cm	
IMO/P 6	6	5	1.250	100	160	170	35
IMO/P 9	9	7	1.800	100	160	220	41
IMO/P 12	12	9	2.400	100	160	270	46
IMO/P 13	13	11	2.750	140	160	220	50
IMO/P 18	18	14	3.600	140	160	270	55
IMO/P 21	21	17	4.250	160	250	190	67
IMO/P 24	24	19	4.800	160	180	270	68
IMO/P 26	26	21	5.300	160	250	220	74
IMO/P 35	35	28	7.000	160	250	270	83
IMO/P 40	40	32	8.000	160	290	270	91
IMO/P 44	44	35	8.800	250	200	270	94
IMO/P 55	55	40	11.000	250	250	270	110
IMO/P 75	75	60	15.000	250	325	270	141
IMO/P 90	90	70	18.000	250	400	270	168
IMO/P 100	100	80	20.000	250	450	270	187
IMO/P 125	125	100	25.000	250	550	270	219
IMO/P 150	150	120	30.000	250	650	270	259
IMO/P 175	175	140	35.000	250	750	270	298
IMO/P 225	225	180	45.000	250	950	270	364

The values stated are just for information. EMS WATER TECHNOLOGY retains the right to change them at any time.